


ELECDAN Converter **STEP-UP VOLTAGE REGULATOR** SKU: SUR-5469-7218-1 (or 2 or 3 or 4)

www.elecdan-converter.com

PDF file	Voltages		Outputs		Efficiency	Max leakage	Thermal curves §13, PDF file No.	Cooling specificity of each model / case and volume (cm ³) connector excluded	Photo No.	Cases § 11 PDF file No.	Availability	Delivery time	Pre-tax price (€)	
	In	Out	Current	Power									1 unit	10 units
§1 to 15	54 to 69V	72V	18A	1296W	> 0,97	40W	1	dynamic dissipation (250)	1	1				
							2	independent passive dissipation (100)	2	2				
							3	standard passive dissipation (500)	3	3				
							4	reinforced passive dissipation (1000)	4	4				

Powered by three 450W photovoltaic panels "18V / 23V" connected in series, this step-up regulator replaces (with very high efficiency) conventional dc/dc converters when input/output insulation is not required.

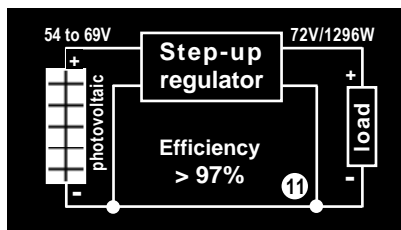

- Transforms 3 photovoltaic panels into a powerful stabilized generator 72V / 1296W
- High efficiency allowing reduced dimensions and low weights
- Four presentations (100cm³ to 1000cm³) to offer various thermal options
- Scalable cooling options, to push back the thermal limits
- Wire loss reduction, in case of remote mounting (connections ≤ 72mm²)
- Neutralized vibrations + tropicalisation + sealing: IP63 / IP67 casting

Detailed sections	§
protections	4
thermal data	5/11/12/13
mechanical data	7 / 8 / 11
possible assembling	15
standards & specific.	9
height x width x depth (mm) / weight	
1 or 2 mounting possibilities	

Case ①	Case ②	Case ③	Case ④
			as case ③ but with dissipator measuring 225mm (instead of 112mm)
96 x 64 x 61 / 380g	92 x 64 x 40 / 290g	112.6 x 120 x 47 / 700g	225.2 x 120 x 47 / 1150g
Clip & 2 screws	2 screws	Clip & 2 screws	Clip & 2 screws

Temperatures	without derating	- 30°C to + 50°C	to be cooled	- 40°C to + 30°C	- 40°C to + 50°C
		with derating storage	- 30°C to + 70°C		- 40°C to + 90°C
				- 40°C to + 100°C	