


**ELECDAN Converter** **STEP-UP VOLTAGE REGULATOR** SKU: SUR-345395-4005-1 (or 2 or 3 or 4)

[www.elecdan-converter.com](http://www.elecdan-converter.com)

PDF file	Voltages		Outputs		Efficiency	Max leakage	Thermal curves §13, PDF file No.	Cooling specificity of each model / case and volume (cm <sup>3</sup> ) connector excluded	Photo No.	Cases § 11 PDF file No.	Availability	Delivery time	Pre-tax price (€)	
	In	Out	Current	Power									1 unit	10 units
§1 to 15	345V to 395V	400V	5A	2kW	> 0,98	36W	1	dynamic dissipation (250)	1	1				
							2	independent passive dissipation (100)	2	2				
							3	standard passive dissipation (500)	3	3				
							4	reinforced passive dissipation (1000)	4	4				

Neutralizing the fluctuations ( $\pm 25V$ ) of a nominal 370V generator, this step-up regulator delivers 400V / 2kW, with very high efficiency. It can be used whenever input/output insulation is not required.

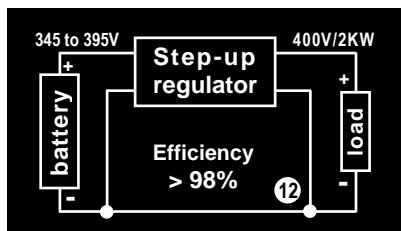

- Stabilizes at 400V / 2kW a high voltage (370V) fluctuating up to  $\pm 25V$
- High efficiency allowing reduced dimensions and low weights
- Four presentations (100cm<sup>3</sup> to 1000cm<sup>3</sup>) to offer various thermal options
- Scalable cooling options, to push back the thermal limits
- Wire loss reduction, in case of remote mounting (connections  $\leq 72mm^2$ )
- Neutralized vibrations + tropicalisation + sealing: IP63 / IP67 casting

Detailed sections	§
protections	4
thermal data	5/11/12/13
mechanical data	7 / 8 / 11
possible assembling	15
standards & specific.	9
height x width x depth (mm) / weight	
1 or 2 mounting possibilities	

Case ①	Case ②	Case ③	Case ④
			as case ③ but with dissipator measuring 225mm (instead of 112mm)
96 x 64 x 61 / 380g	92 x 64 x 40 / 290g	112.6 x 120 x 47 / 700g	225.2 x 120 x 47 / 1150g
Clip & 2 screws	2 screws	Clip & 2 screws	Clip & 2 screws

Temperatures	without derating	- 30°C to + 50°C	to be cooled	- 40°C to + 30°C	- 40°C to + 50°C
		with derating storage	- 30°C to + 70°C		- 40°C to + 90°C
				- 40°C to + 100°C	